



R



flooring assortment



www.krono-original.com



Welcome to our world!

PRODUCT OVERVIEW	04
SURFACE TEXTURES	06
FEATURES GUIDE	07
MO.RE!	08
	10

26	ACCESSORIES	50
32	DECOR OVERVIEW	58
38	PACKAGING INFORMATION	59




ALTITUDE


ATLANTIC 12

ATLANTIC 8

www.krono-original.com www.facebook.com/KronoOriginal





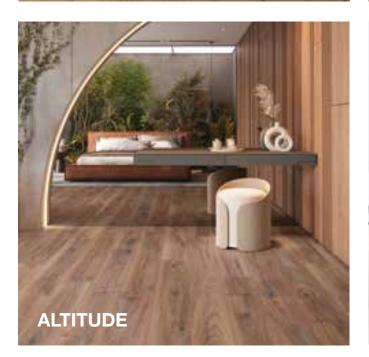










Product overview

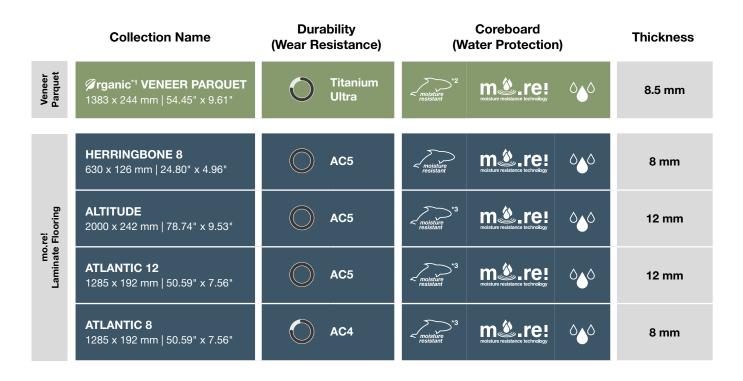

How mo.re! technology works

mo.re! is based on a specially developed substrate formula.

Its new binding agent makes the flooring more durable and decreases swelling – improving resistance to moisture penetration.




Scan the QR code and check out the mo.re! features!

- *1 Consists of natural wood and an organic chemical binder.
- *2 Tested according to NALFA Laminate Surface Swell Test and according to ISO 4760 (Topical moisture resistance Assembled joint)
- *3 48 h splash-water protection according to works standard specification KRONOSPAN WN-103, www.floor-with-more.com
- *4 According to warranty terms
- *5 Selected decors


Utilization Class	Pet- proof	Residential Guarantee [∗]	Bevel	Joint	Synchro	SKUs
32	*	20 years	Soft Bevel	Tap Loc	-	9
32	*	20 years	V 4	Fold Down	Yes	8
33	*	30 years	V4	1clic 2go pure	Yes	6
33	**	30 years	V4	1clic 2go pure	Yes	6
32	*	20 years	V4	1clic 2go pure	Yes⁺⁵	15

Σ44

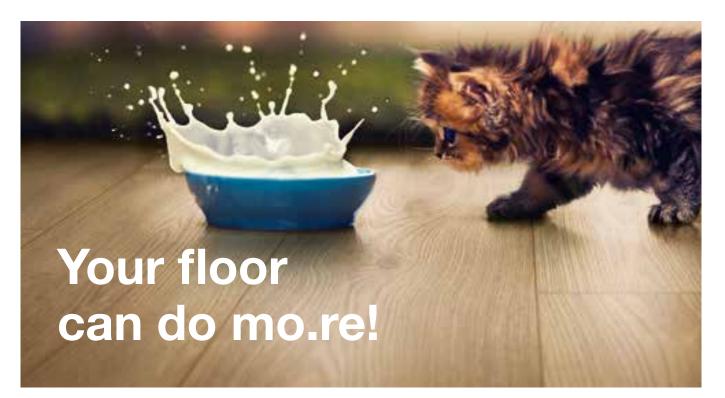



Surface textures The look and feel of real wood

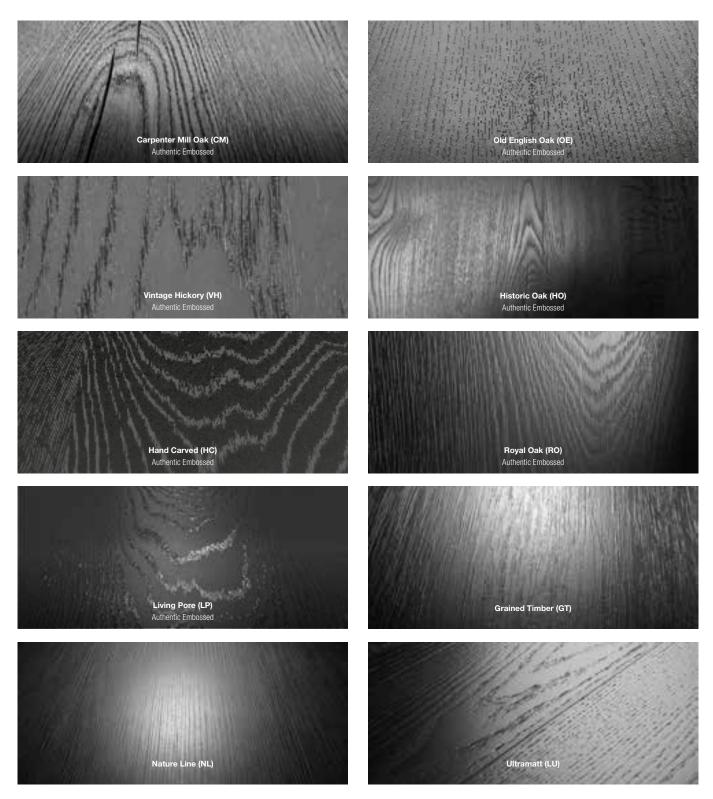

Features guide Your benefits at a glance



All floors are put through a series of rigorous tests in order to comply with international quality standards, which is why we grant an extensive residential warranty with every product.





Bevelled edges on all four sides of the plank ensure an authentic floorboard look.

Real groove



Inspired by traditional craftsmanship, the true-edgebevels provide a harmonious room appearance.



A.B.C. Anti Bacterial Comfort inhibits the growth of bacteria on your flooring and provides you with the peace of mind that comes from a healthy home environment. (Tested germs: Staphylococcus aureus).

Anti bacterial comfort



The synchronous pores follow the grain of the decor, meaning they flawlessly mimic the character of natural wood.





The robust surface protects your flooring against microscratches that can be caused by strong mechanical stresses or the claws of house pets.

Microscratch protect



Thanks to the robust surface, which is also undaunted by small mishaps, the flooring is exceptionally well-suited for life with house-pets.



The flooring is light-resistant: Even on days when the sun is shining for hours, your flooring remains nonfading according to rating 6, the highest level of the Blue Wool Scale.

* R9/10
Anti-slip class

Safety is something we put great emphasis on. Classification in anti-slip classes has been achieved through specially developed surface structures, which address the requirements for floor coverings in the workplace and commercial areas where a high risk of slipping is present.

Classification: R9 and R10 according to DIN 51330



This floor is made from real wood. The high-quality brushed oak surface gives every room natural elegance.



The flooring provides complete protection against unpleasant shocks. The Anti-static is built-in and guaranteed for the life of the floor.

Anti-static



mo.re! can stand up to what life brings



Take more. Endure more. Withstand more.

mo.re! from Kronospan is a moisture resistance technology that makes flooring even more practical for everyday life.

mo.re! flooring is much more **moisture-resistant** than traditional laminate flooring.

mo.re! flooring masters the everyday challenges of households with pets.

mo.re! flooring is great for installation in private bathrooms*.



Scan the QR code and check out the mo.re! features!

* Please refer to the installation instructions






mo.re! for the environment

It is made using only wood from sustainably managed forests. And KRONOSPAN does not use any PVC in flooring with the mo.rel technology. This demonstrates our commitment to environmental steward-ship. mo.rel substrate is CO_2 -negative: Processing a tree to make this product emits less CO_2 than the tree has stored in its life.

* May contain traces of PVC, e.g. from packaging



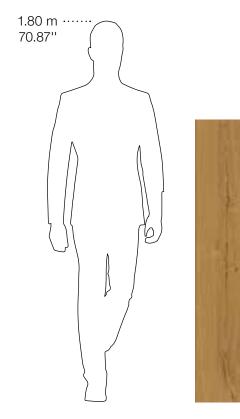

Format

1383 (54.45") x 244 (9.61") x 8.5 mm

- Moisture resistant* wooden floor with a real 0.6 mm wood veneer as the top layer
- True-edge-bevel for a harmonious room appearance
- Ultramatt surface
- The middle layer consists of a high-density fibreboard (HDF) and makes the flooring particularly stable and durable
- Wood from sustainably managed forests
- Veneer parquet is a resource-saving and sustainable alternative to conventional parquet flooring



EN 14354

mo.re! sustainability



rganic VENEER PARQUET



Thickness 8.5 mm Lock Tap Lock



EN 14354



0273 Oak Bradford, LU



0462 Oak Schönbrunn, LU



0274 Oak Sunderland, LU

rganic VENEER PARQUET



Thickness 8.5 mm Lock Tap Lock



EN 14354



0940 Oak Versaille, LU



O350 Oak Cream, LU



0352 Oak Roast, LU



Thickness 8.5 mm Lock Tap Lock



EN 14354




0272 Oak Bristol, LU



0941 Oak Alhambra, LU





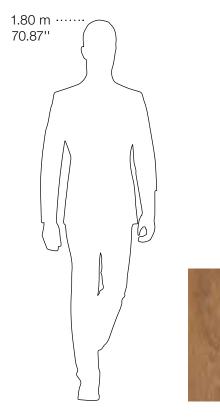

Format

630 (24.80") x 126 (4.96") x 8 mm

- Looks like parquet, as easy to care for as laminate
- High quality Authentic Embossed texture
- Splash-proof
- Specially protected against microscratches
- A.B.C. Anti bacterial comfort*



EN 13329

mo.re! style





Thickness 8 mm Lock Fold Down





5953 Chantilly Oak, HO



K326 Sundance Oak, RO





Thickness 8 mm Lock Fold Down



EN 13329



K476 Inca Carpenter Oak, CM







Thickness 8 mm Lock Fold Down



EN 13329



K450 Firebrand Oak, HO




8573 Harlech Oak, LP



K411 Laguna Oak, OE



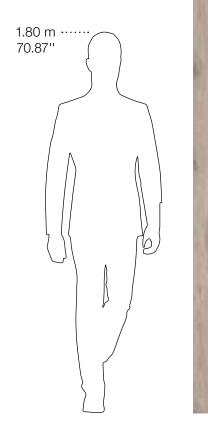

Format

2000 (78.74") x 242 (9.53") x 12 mm

- Traditional solid wood format
- 12 mm strong planks
- High quality Authentic Embossed texture
- Integrated Anti-static effect
- Splash-proof
- Specially protected against microscratches
- A.B.C. Anti bacterial comfort**



EN 13329





* 48 h splash-water protection according to works standard specification KRONOSPAN WN-103, www.floor-with-more.com ** Tested germs: Staphylococcus aureus



Thickness 12 mm Lock 1clic 2go pure



EN 13329




5953 Chantilly Oak, HO



5954 Hardy Oak, HO



K392 Atomic Oak, RO

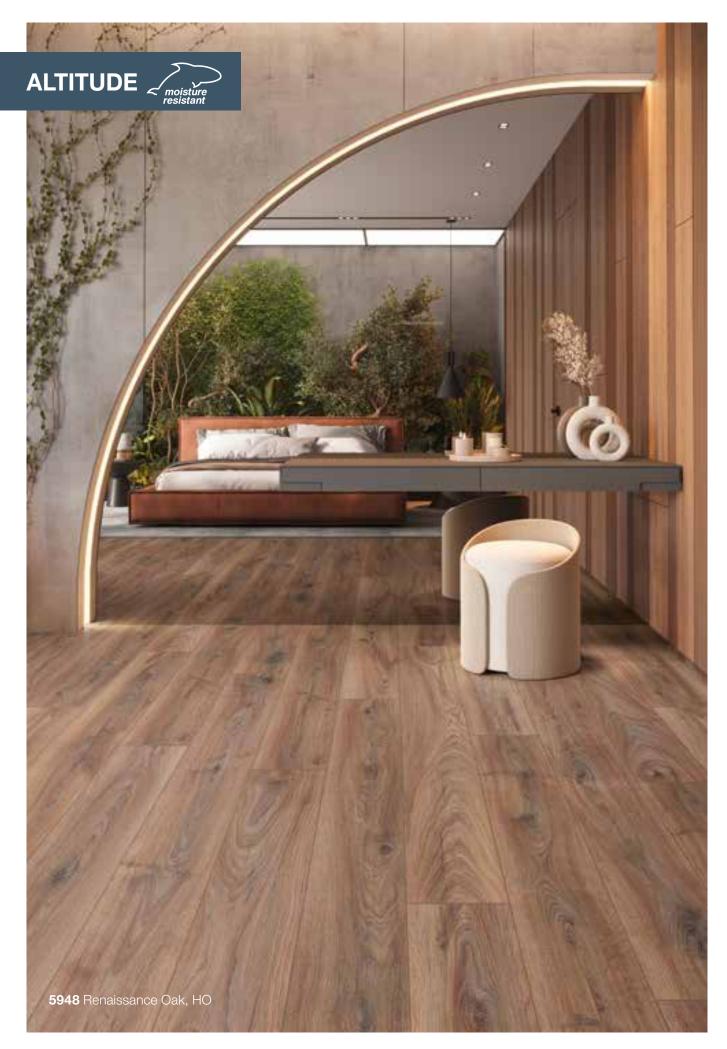

Thickness 12 mm Lock 1clic 2go pure



EN 13329



K326 Sundance Oak, RO




8155 Appalachian Hickory, VH



5948 Renaissance Oak, HO



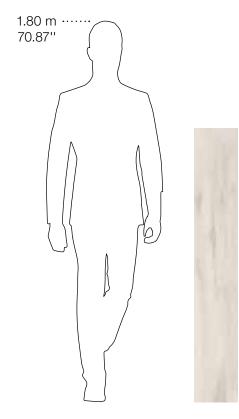

Format

1285 (50.59") x 192 (7.56") x 12 mm

- 12 mm strong planks
- High quality Authentic Embossed texture
- Splash-proof
- Specially protected against microscratches
- A.B.C. Anti bacterial comfort**



EN 13329

mo.re! reliability





Thickness 12 mm Lock 1clic 2go pure



EN 13329




K336 Iceberg Oak, HC



K285 Haybridge Oak, HO



K476 Inca Carpenter Oak, CM

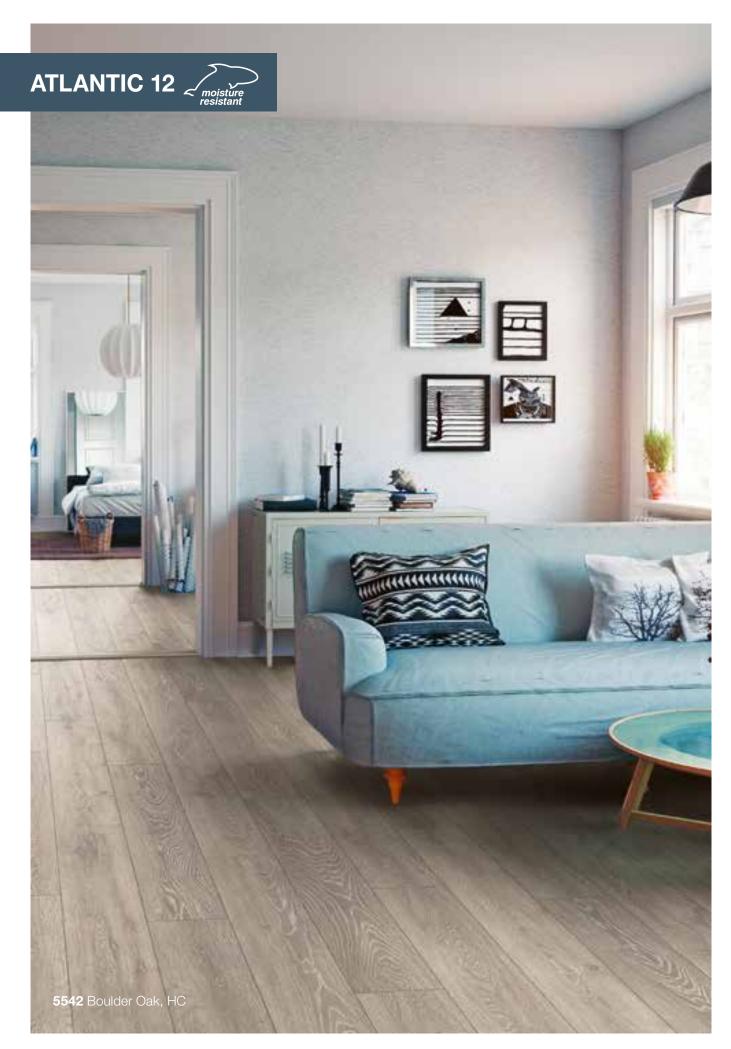



EN 13329




5542 Boulder Oak, HC




K287 Steelworks Oak, HO



5541 Bedrock Oak, HC

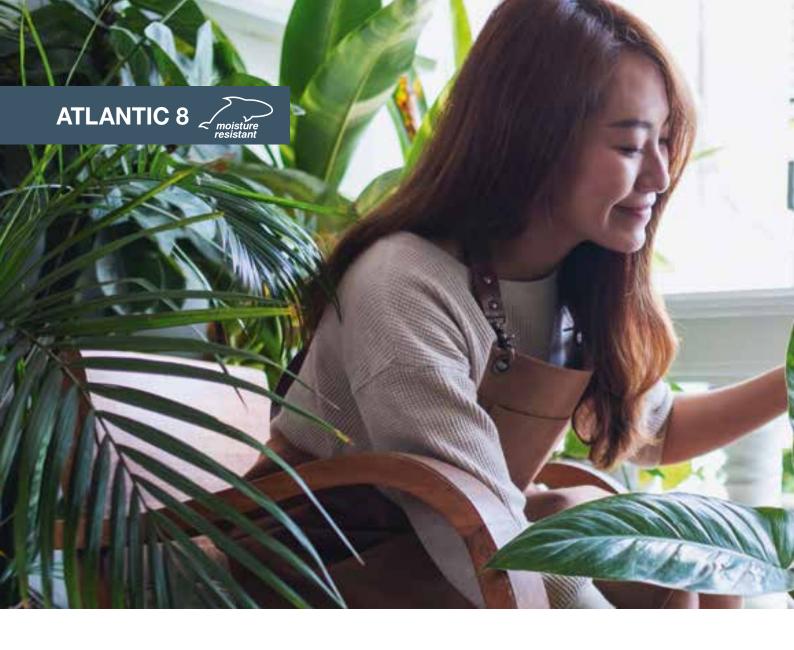

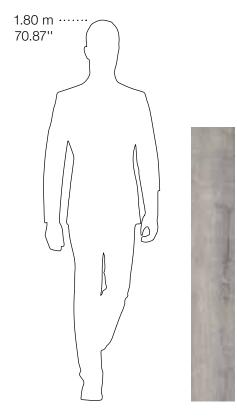

Format

1285 (50.59") x 192 (7.56") x 8 mm

- The multi-talent for the whole family: variety on decors to suit any taste
- Splash-proof
- A.B.C. Anti bacterial comfort**
- Environmentally friendly




EN 13329

mo.re! nature







EN 13329



K460 Orchid Oak, NL




K451 Silverdale Oak, HO



K392 Atomic Oak, RO





EN 13329



K481 Urban Heritage Chestnut, NL



K463 Weathered Volcano Oak, NL



K472 Dove Cashmere Oak, NL





EN 13329




K452 Ashland Oak, HO



K469 Tortilla Cashmere Oak, NL



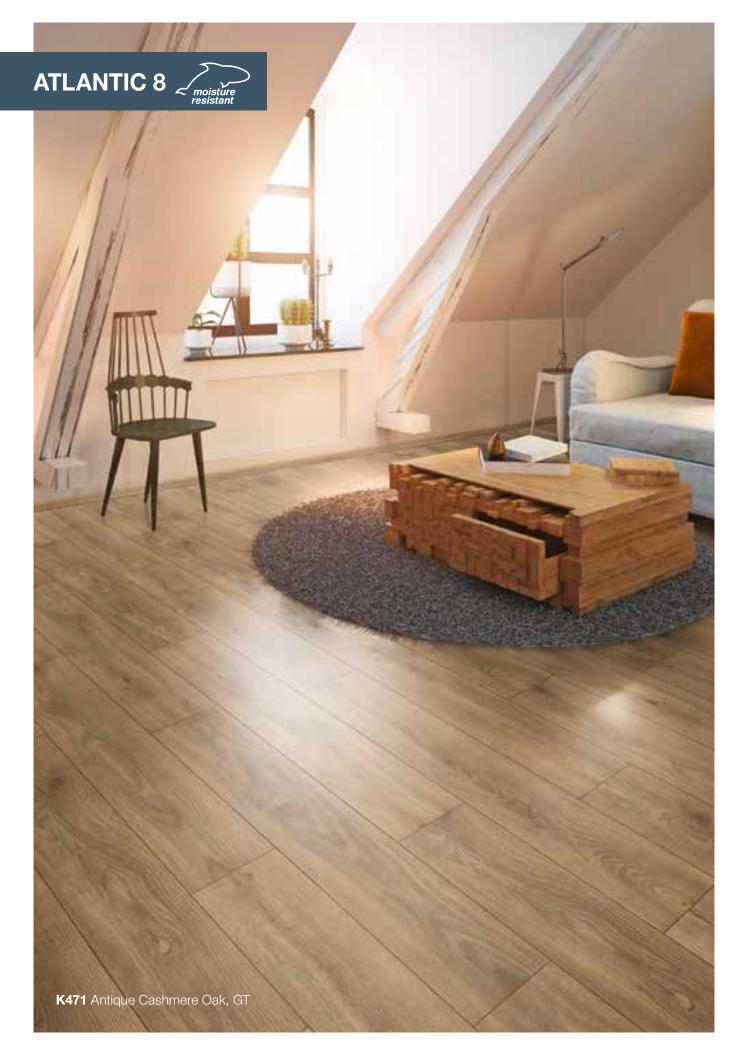



EN 13329




K326 Sundance Oak, RO



K327 Hillside Oak, RO



K471 Antique Cashmere Oak, GT

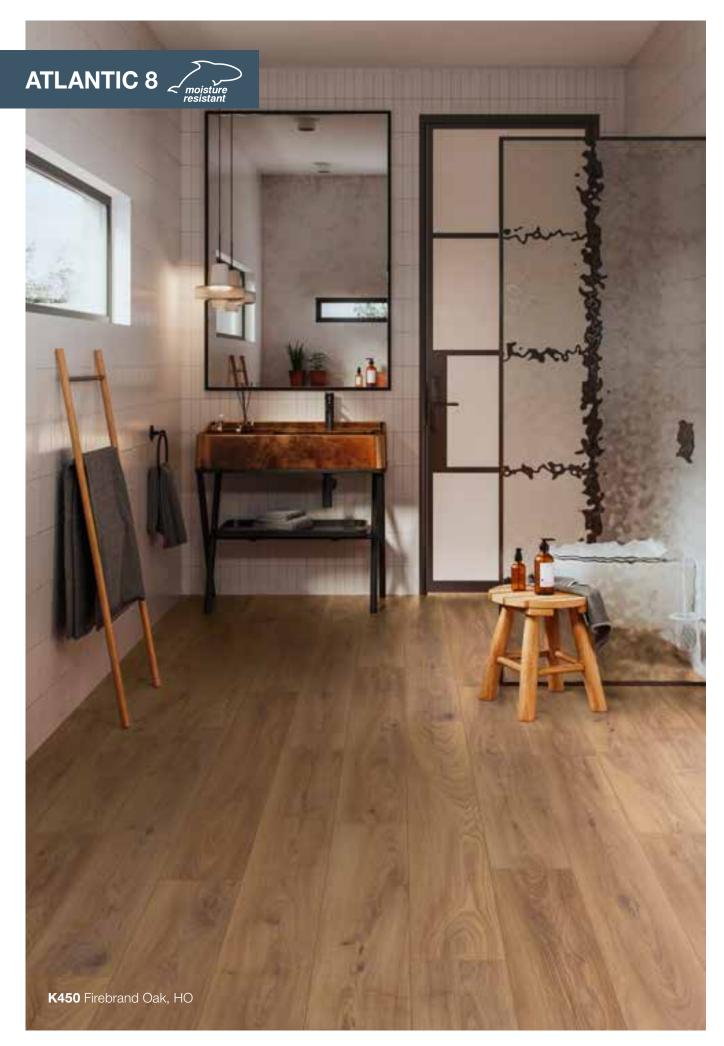



EN 13329



K450 Firebrand Oak, HO



K461 Antique Volcano Oak, NL



K480 Colonial Heritage Chestnut, NL



Accessories that match your floor perfectly

Selected range of products

Every floor needs proper accessories. We can supply you with the ideal equipment for all types of flooring. One contact, one supplier – which makes everything so much simpler for you.

Underlays

Depending on the situation in the room, attention must be paid to the correct underlay material when installing the flooring. For this we offer multiple solutions.

Skirting boards

Choose from a range of skirtings in various decors that match all KronoOriginal[®] floors. Our advanced fixing system makes it quick and simple to achieve a perfect installation.

Additional accessories

If you still look for the proper skirting board, corner pieces, aluminium adhesive tape for sealing or you are done and wish to mop the floor, take a look at the following pages and discover the wide range of accessories.

Get more out of your mo.re! products


With suitable accessories, you leave nothing to chance –

whether you are looking for the right underlay, skirting boards, end pieces, corners and profiles for a harmonious finish, practical tools or the right cleaning agent.



Discover the full range!



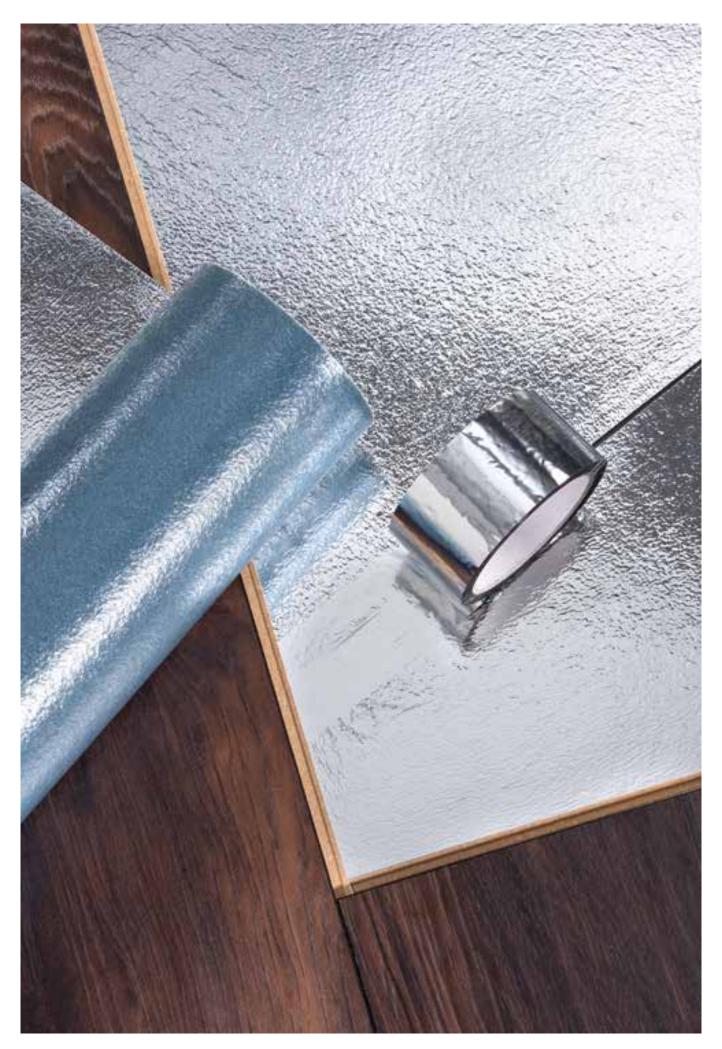



Accessories

Article	Illustration	on Item No. Descrip [Customer Code]		Packing Unit	
Underlay PUR 2.0		98571 [EX KO98571N]	Material: Polyurethan and mineral fillers	1 x 7.5 m = 7.5 m²	
Underlay WOOD 5.0		90171 Material: Wood fibres [EX 90171]		0.79 x 0.59 m x 15 = 7 m²	
Underlay XPS 5.0		98536 [EX XPS5.0]	Material: Extruded polystyrene	1.18 x 4.7 m = 5.5 m²	
Underlay XPS 2.2 ALU		98515 [EX XPS2.2ALU]	Material: HFPS-foam & moisture protection foil	1.2 x 12.5 m = 15 m²	
PE foil		98111 [EX FOLIE2.0]			
Aluminium tape	D	98191 [EX ALUBAND]	Thickness: 0.048 mm Width: 50 mm	1 roll (50 m)	
Transition profile, 2-part, screw-in		91231 91221	900 mm or 2700 mm	1 pcs.	
Ramp profile, 2-part, screw-in	-	91251 91241	900 mm or 2700 mm	1 pcs.	

Article	Illustration	Item No. [Customer Code]		
End profile, 2-part, screw-in	4	91211 91201	900 mm or 2700 mm	1 pcs.
Transition click profile		98391 98381	900 mm or 2700 mm	1 pcs.
Ramp click profile		98411 98401	900 mm or 2700 mm	1 pcs.
End click profile	-	98371 98361	900 mm or 2700 mm	1 pcs.
K40C	E	94531 [EX xxxxK40C]	2600 x 40 x 19 mm	10 pcs.
K58C	E	91061 [EX xxxxSLH]	2600 x 58 x 18 mm	10 pcs.
K70	E	91311 [EX xxxxK70]	2600 x 70 x 21 mm	10 pcs.
K80.16		96031 [EX xxxxK80_16]	2600 x 80 x 16 mm	10 pcs.



Accessories

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit
K14/22		91001 [EX xxxxK14] 91051 [EX xxxxK22]	2600 x 12 x 12 mm (K14) 2600 x 22 x 22 mm (K22)	30 pcs.
K50	E	91065 [EX xxxxK50]	2600 x 50 x 18 mm	10 pcs.
K58D Trend skirting board in aluminium	E	95971 [EX DxxxxK58D]	2600 x 58 x 19 mm	10 pcs.
Square cut skirting board		95951 [EX 9002DS19_100]	2600 x 100 x 17 mm	5 pcs.
Square cut skirting board	E	95481 [EX 9002DS19_70]	2600 x 70 x 17 mm	10 pcs.
Square cut skirting board	E	95491 [EX 9002DS19_58]	2600 x 58 x 17 mm	10 pcs.
Shaped skirting board		95981 [EX 9002DS17_100]	2600 x 100 x 17 mm	5 pcs.
Shaped skirting board	E	95991 [EX 9002DS17_70]	2600 x 70 x 17 mm	10 pcs.

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit
Shaped skirting board	E	95471 EX 9002DS17_58]	2600 x 58 x 17 mm	10 pcs.
Rounded skirting board		96001 [EX 9002DS15_100]	2600 x 100 x 15 mm	5 pcs.
Rounded skirting board		96021 [EX 9002DS16_90]	2600 x 90 x 16 mm	5 pcs.
Rounded skirting board	E	96011 [EX 9002DS15_70]	2600 x 70 x 17 mm	10 pcs.
K58C Design skirting board	E	97345 [EX 97345-9002] (white) 97345 [EX 97345-L056] (silver)	2400 x 58 x 18 mm	10 pcs.
KKSL Plastic skirting	18-1	97342 [EX 97342-xxxx]	2500 x 50 x 22.5 mm	20 pcs.
Accessories for K40C skirting board		93432	External corners Internal corners End caps	Set: 2 external corners, 90°; 2 internal corners, 90°; 2 end caps
Accessories for K58C skirting board		98011 98001 98021	External corners Internal corners End caps	90° in packs of 2 90° in packs of 2 in packs of 4, 2 left and 2 right




Accessories

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit
Mounting clips	Hart Frank	91501 [EX 50510]	-	Box of 30 pieces, complete with screws and rawl plugs
Tap-block		90274 [EX SCHLAGKLOTZ]	168/90 x 70 x 20 mm	20 pcs.
Spacer		90292 [EX ABSTANDSKEIL]	-	30 spacer per bag
Clickguard™ joint sealant		90431 [EX 94270]	-	125 ml ≙ca. 10 m²
Wax-repair set, mixable	Marine State	90511 [EX F996]	-	7 wax blocks, 1 melting tool, 1 cleaning combed scraper, 1 green/white pad, 1 grey abrasive pad
Laminate cleaner	1	90411 [EX 92011]	-	1000 ml





Decor overview

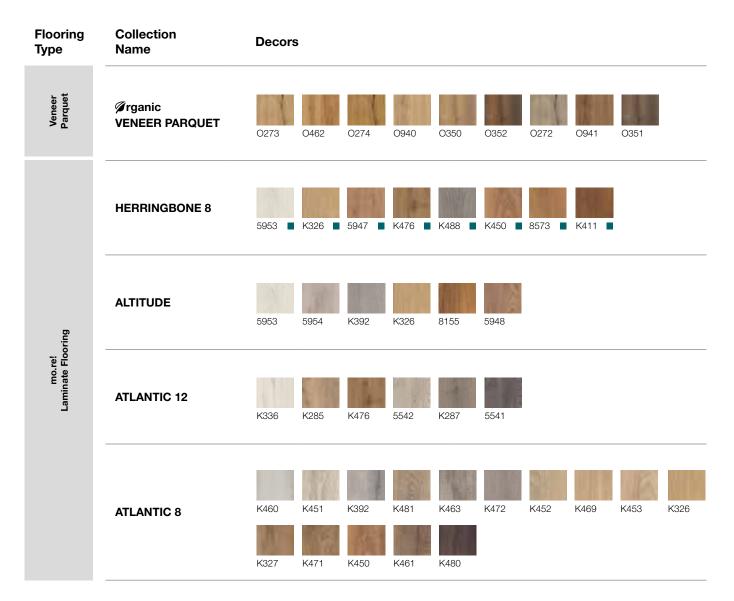

decor editions

Packaging information

Plank Size	Thickness	Planks/ Pack.	m²/ sq ft/Pack.	Weight/Pack. [kg lbs]	Pack./Pallet = m²/sq ft
1383 x 244 mm 54.45" x 9.61"	8.5 mm	7	2.36 25.42	16 35	45 = 106 1144
630 x 126 mm 24.80" x 4.96"	8 mm	11	0.87 9.40	6 13	96 = 84 902
2000 x 242 mm 78.74" x 9.53"	12 mm	4	1.94 20.83	20 44	36 = 70 750
1285 x 192 mm 50.59" x 7.56"	12 mm	6	1.48 15.93	15 34	52 = 77 828
1285 x 192 mm 50.59" x 7.56"	8 mm	9	2.22 23.89	15 34	52 = 115 1242



Made by Kronospan





* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions). Statement on level of emission of volatile substances in indoor air posing a toxic threat during inhaling – on a scale from A+ (very low-emission) to C (high-emission).

www.eco-institut.de/e/portfolio/emissions-dans-lair-interieur

Δ+



www.krono-original.com www.facebook.com/KronoOriginal



www.kronospan.com info@krono-original.com