



<sup>®</sup>  
**Krono  
Original**  
High Quality  
Made by Kronospan

**2023**  
flooring  
assortment

**O.R.C.A.<sup>®</sup>**  
MOISTURE DEFENSE TECHNOLOGY

[www.krono-original.com](http://www.krono-original.com)



# Welcome to our world!

PRODUCT OVERVIEW	04
SURFACE TEXTURES	06
FEATURES GUIDE	07
O.R.C.A. TECHNOLOGY	08

---

<b>Organic</b> FLEX	14
<b>Organic</b> LONG	24
<b>Organic</b> CLASSIC 12	30
<b>Organic</b> CLASSIC 8	38
<b>Organic</b> CLEVER LONG	52
<b>Organic</b> CLEVER SILENT	58
<b>Organic</b> CLEVER	66

---

FORMAT OVERVIEW	74
ACCESSORIES	76
DECOR OVERVIEW	82
PACKAGING INFORMATION	83

---



[www.krono-original.com](http://www.krono-original.com)

[www.facebook.com/KronoOriginal](https://www.facebook.com/KronoOriginal)



**rganic FLEX**



**rganic LONG**



**rganic CLEVER**































**rganic CLASSIC**



**ACCESSORIES**

## Product overview















	Collection Name	Durability (Wear Resistance)	Coreboard (Water Protection)	Thickness
O.R.C.A. Flooring	<b>Organic<sup>*1</sup> FLEX</b> 638 x 322 mm   25.12" x 12.68" 1288 x 189 mm   50.71" x 7.44"	 <b>Titanium Ultra</b>	 <sup>+2</sup>  	<b>7 mm</b> PerfectPad® Cork
	<b>Organic<sup>*1</sup> LONG</b> 2003 x 195 mm   78.86" x 7.68"	 <b>AC5</b>	 <sup>+2</sup>  	<b>8 mm</b>
	<b>Organic<sup>*1</sup> CLASSIC 12</b> 1288 x 195 mm   50.71" x 7.68"	 <b>AC5</b>	 <sup>+2</sup>  	<b>12 mm</b>
	<b>Organic<sup>*1</sup> CLASSIC 8</b> 635 x 327 mm   25.00" x 12.87" 1285 x 192 mm   50.59" x 7.56"	 <b>AC5</b>	 <sup>+2</sup>  	<b>8 mm</b>
	<b>Organic<sup>*1</sup> CLEVER LONG</b> 2003 x 245 mm   78.86" x 9.65"	 <b>AC5</b>	 <sup>+2</sup>  	<b>6 mm</b>
	<b>Organic<sup>*1</sup> CLEVER SILENT</b> 1288 x 195 mm   50.71" x 7.68"	 <b>AC5</b>	 <sup>+2</sup>  	<b>6+1 mm</b> PS Pad
	<b>Organic<sup>*1</sup> CLEVER</b> 1288 x 195 mm   50.71" x 7.68"	 <b>AC5</b>	 <sup>+2</sup>  	<b>6 mm</b>

\*1 Consists of natural wood and an organic chemical binder.

\*2 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, [www.100hour-test.com](http://www.100hour-test.com), up to 100 h no leakage

\*3 According to warranty terms

\*4 Selected decors







Utilization Class	Pet-proof	Residential Guarantee <sup>3</sup>	Bevel	Joint	Synchro	SKUs
34 		30 years	V4	1clic 2go pure+	-	11
33 		30 years	V4	1clic 2go pure+	Yes	6
33 		30 years	V4	1clic 2go pure+	Yes	8
33 		30 years	V4	1clic 2go pure	Yes <sup>4</sup>	17
32 		20 years	V4	1clic 2go pure+	-	6
32 		20 years	V4	1clic 2go pure+	-	9
32 		20 years	V4	1clic 2go pure+	-	8

Σ 65

# The floor that takes it all

## Surface textures

The look and feel of real wood and stone

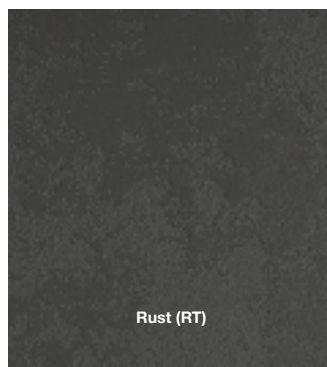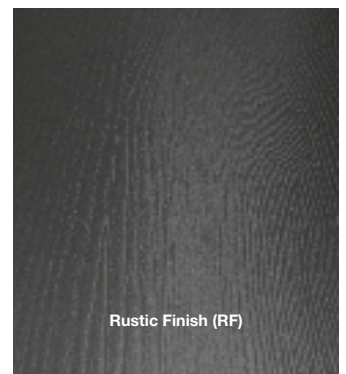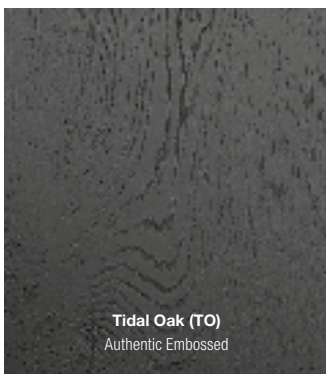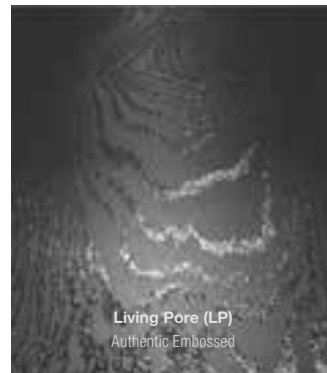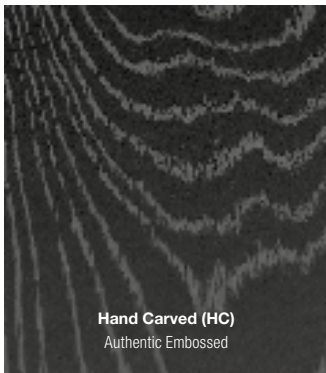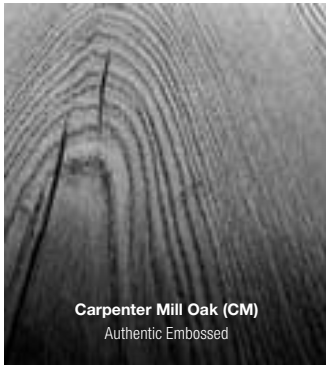

# Features guide

## Your benefits at a glance



Residential guarantee

All floors are put through a series of rigorous tests in order to comply with international quality standards, which is why we grant an extensive residential warranty with every product.



Silent

Due to an integrated pad, the flooring reduces impact sound, echoes and vibrations. An additional underlay is not required, which saves time and money.



Real groove

Bevelled edges on all four sides of the plank ensure an authentic floorboard look.



Robust

This flooring is amazingly robust due to its super durable surface. Moving furniture or falling objects are not a problem because of its high pressure and impact resistance.



Anti bacterial comfort

A.B.C. Anti Bacterial Comfort inhibits the growth of bacteria on your flooring and provides you with the peace of mind that comes from a healthy home environment. (Tested germs: Staphylococcus aureus).



Warm underfoot

Due to its flexible design layer, the flooring has comfortable haptics and is warm underfoot.



Authentic embossed

The synchronous pores follow the grain of the decor, meaning they flawlessly mimic the character of natural wood.



Anti-slip class

Safety is something we put great emphasis on. Classification in anti-slip classes has been achieved through specially developed surface structures, which address the requirements for floor coverings in the workplace and commercial areas where a high risk of slipping is present.



Microscratch protect

The robust surface protects your flooring against micro-scratches that can be caused by strong mechanical stresses or the claws of house pets.



Anti-slip class

Classification:  
R9 and R10 according to DIN 51330,  
A: according to DIN 51097



Pet-proof

Thanks to the robust surface, which is also undaunted by small mishaps, the flooring is exceptionally well-suited for life with house-pets.



Soft touch

The flooring has a soft surface and feels very comfortable.



Light-resistant

The flooring is light-resistant: Even on days when the sun is shining for hours, your flooring remains non-fading according to rating 6, the highest level of the Blue Wool Scale.



Anti-static


The flooring provides complete protection against unpleasant shocks. The Anti-static is built-in and guaranteed for the life of the floor.



**MOISTURE DEFENSE TECHNOLOGY**

## How O.R.C.A. technology works

Each fiber is encapsulated with a special binder that prevents it from absorbing water

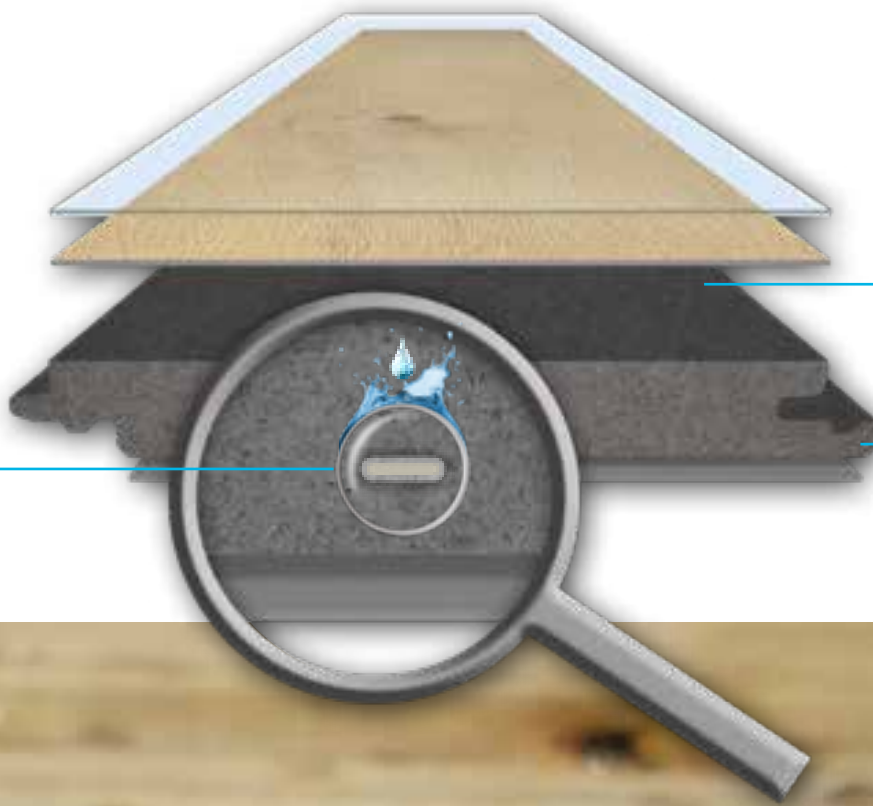

Short fiber length and geometry reduces potential expansion

Micro expansion on the edges seals the connection between planks







## Wood's self sealing property

Wood expands when exposed to moisture and in doing so seals itself, preventing liquid penetration

Boat builders take advantage of wood's natural self sealing property

Wine barrels are still sealed using this time tested method





**MOISTURE DEFENSE TECHNOLOGY**

## The floor that combines the best

**O.R.C.A. = Organic\*\* Rigid Coreboard Abrasion-proof**

### **O.R.C.A. is twice as good**

It unites the best qualities of biologically based floors and conventional waterproof floor coverings. In O.R.C.A., organic\*\* materials are made resistant to liquids by means of a special technology.

### **O.R.C.A. makes the flooring usable anywhere**

The innovative O.R.C.A. board makes it possible to install the flooring even in private bathrooms\*\*\* where, until now, only vinyl or tiles could be used. Furthermore, thanks to their outstanding thermal stability and non-fading properties, O.R.C.A. products also can be used in conservatories and rooms with floor-to-ceiling windows.

### **O.R.C.A. floors are extremely robust**

The robust surface with an AC5 durability rating, protects the flooring against microscratches that can be caused by strong mechanical stresses such as moving furniture, falling objects or the claws of house pets. Thanks to its durable properties, which are also undaunted by small mishaps, O.R.C.A. floors are exceptionally well-suited for life with house pets.

### **O.R.C.A. is built better because it is more elaborately manufactured**

The wood fibers are mechanically processed multiple times in a special production process to obtain especially small fibers. Further on in the manufacturing process a specially developed, organic-chemical binding agent surrounds even the finest fibers and isolates them from moisture.

## The floor that's not afraid of water

### **100 h+ splash-water protection guaranteed\***

Little accidents occur almost daily. Wherever such things are bound to happen, it's worth relying on O.R.C.A. Kitchen, dining room, bathroom – O.R.C.A. is a perfect fit.




Scan the QR code and convince yourself!



\* 24 h surface water protection as stipulated by NALFA (North American Laminate Floor Association) with additional 100 h+ surface water protection according to works standard specification KRONOSPAN WN-101, [www.100hour-test.com](http://www.100hour-test.com), up to 100 h no leakage

\*\* Consists of natural wood and an organic chemical binder

\*\*\*Please observe installation instructions

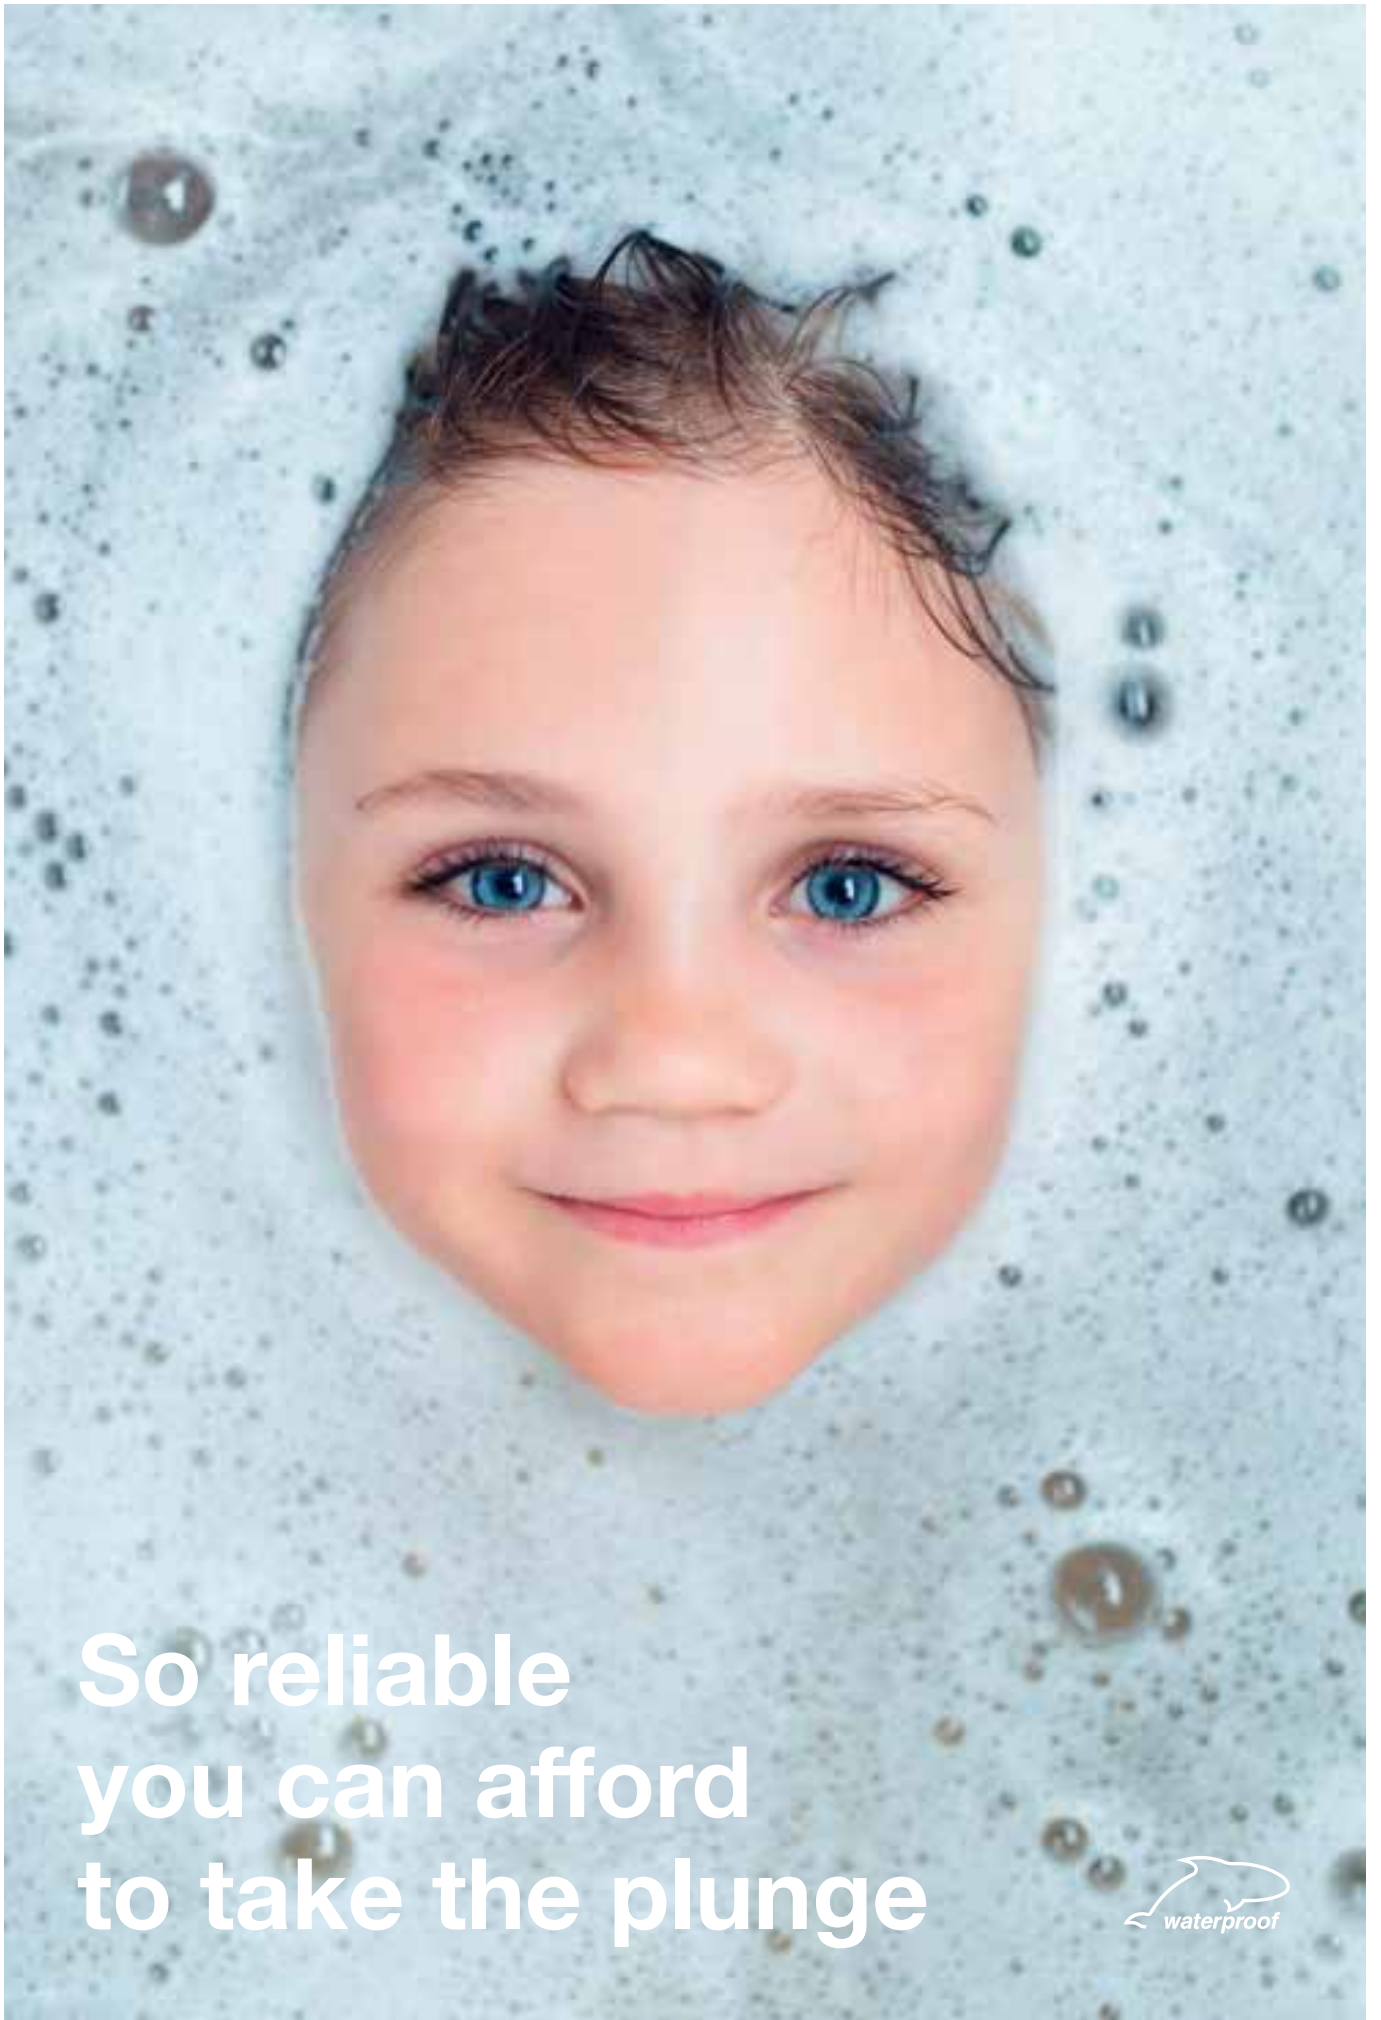

**So reliable  
you can afford  
to take the plunge**



# O.R.C.A.<sup>®</sup>

MOISTURE DEFENSE TECHNOLOGY

## The flooring that is naturally nature-friendly



[www.blauer-engel.de/uz176](http://www.blauer-engel.de/uz176)



### Sustainable

Sustainability isn't just a buzzword for us, but part of our corporate strategy. It would never cross our minds to use wood that didn't come from sustainably managed forests.

### CO<sub>2</sub>-negative

O.R.C.A. boards are CO<sub>2</sub>-negative because manufacturing O.R.C.A. releases less CO<sub>2</sub> than was stored by the tree.

### Organic

Our O.R.C.A. board consists of components based on biological raw materials and organic-chemical binding agents (synthetic resins) and thus is organic.

### PVC-free

Our O.R.C.A. products contain no PVC\*.



\* May contain traces of PVC, e.g. from packaging




**K501** Sand River Oak, TN

**rganic FLEX**  waterproof

with **PerfectPad®** Cork 1 mm



1.80 m .....  
70.87"

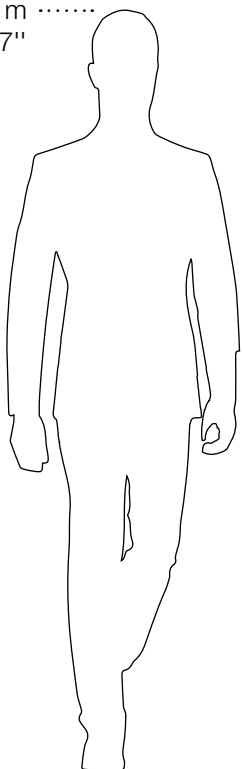

Format

**Wood design 1288 (50.71") x 189 (7.44") x 7 mm**

**Tile design 638 (25.12") x 322 (12.68") x 7 mm**

- ✔ Feels, looks and sounds like vinyl
- ✔ Up to 90 % natural wood
- ✔ Avoids approx. 98 % of plastic
- ✔ Warm underfoot
- ✔ Soft surface, comfortable haptics
- ✔ Silent due to Cork Pad
- ✔ Robust surface
- ✔ Thermally stable (-15 to 60 °C room temperature)



EN 16511



The feel-good floor



**K503** Pebble Manor Oak, TN

**rganic FLEX**  waterproof


with **PerfectPad®** Cork 1 mm



**K506** Lunar Range Oak, TN



Thickness 7 mm  
Lock 1clic 2go pure+



EN 16511



**K500** Pearl River Oak, TN



**K503** Pebble Manor Oak, TN



**K506** Lunar Range Oak, TN


**rganic FLEX**  waterproof

with **PerfectPad**® Cork 1 mm



**K501** Sand River Oak, TN

Thickness 7 mm  
Lock 1clic 2go pure+



EN 16511



**K501** Sand River Oak, TN




**K504** Tuscan Manor Oak, TN




**Organic FLEX**  waterproof

with **PerfectPad®** Cork 1 mm

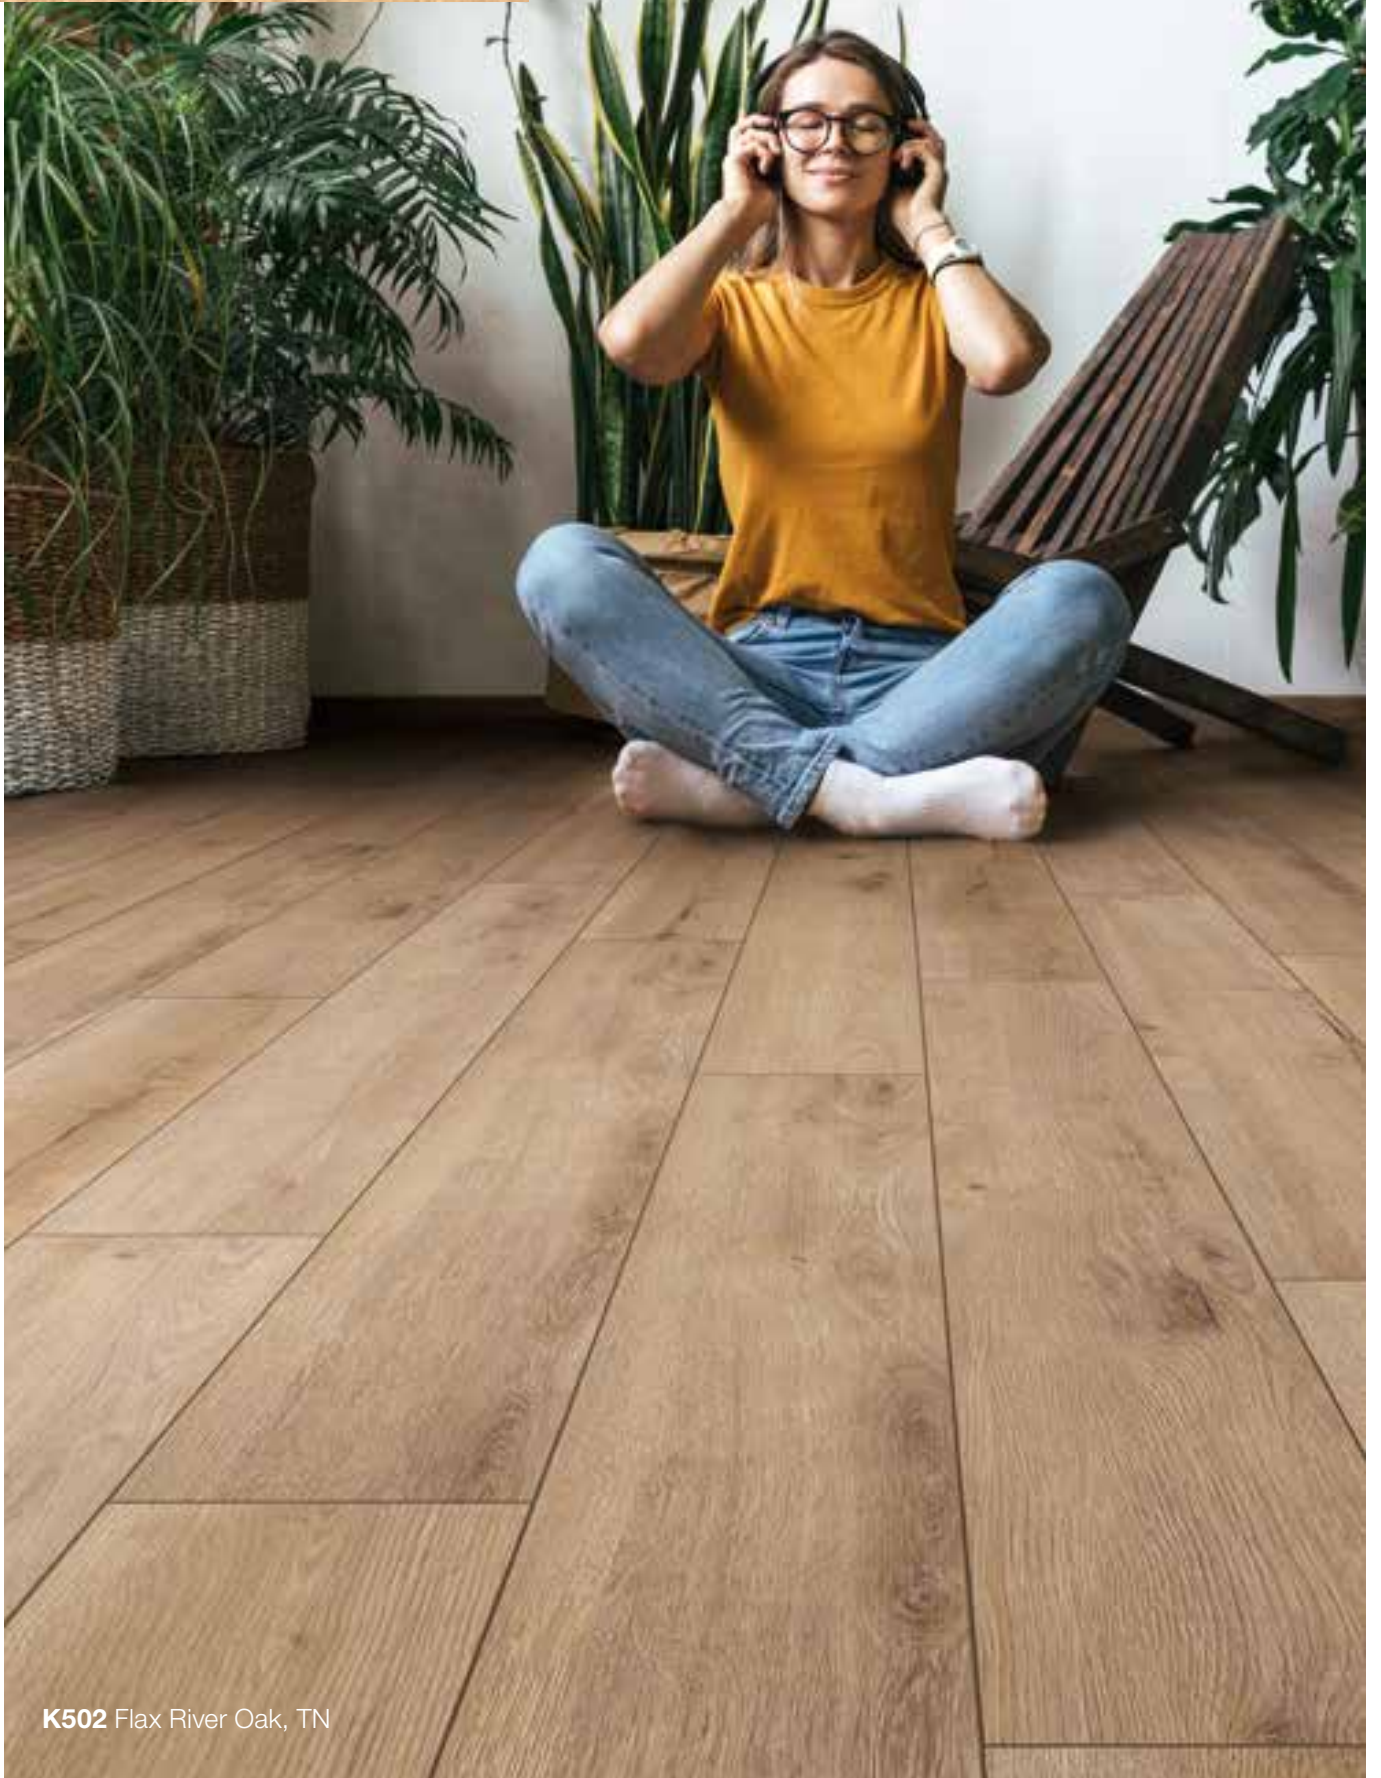

**K502** Flax River Oak, TN

Thickness 7 mm  
Lock 1clic 2go pure+



EN 16511



**K502** Flax River Oak, TN



**K507** Hazel Range Oak, TN



**K505** Tobacco Manor Oak, TN

rganic FLEX  waterproof

with PerfectPad® Cork 1 mm



**K510** Brooklyn Dark, US

Thickness 7 mm  
Lock 1clic 2go pure+



EN 16511



**K508** Brooklyn Mist, US



**K509** Brooklyn Vibe, US




**K510** Brooklyn Dark, US

organic LONG 



**K284** Summer Breeze Oak, RO


1.80 m .....  
70.87"

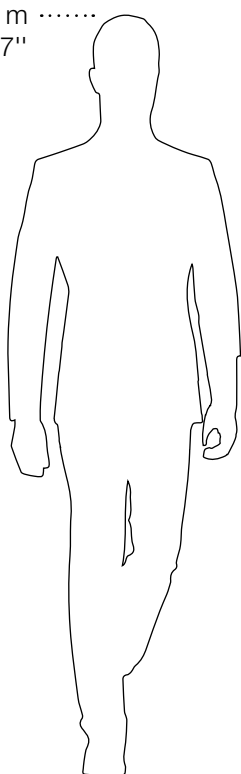

Format

**2003 (78.86") x 195 (7.68") x 8 mm**

- ✔ Elegant long plank format
- ✔ Installation in bigger dimensions
- ✔ Laying through doors
- ✔ Authentic wood texture
- ✔ Integrated anti-static effect
- ✔ Thermally stable (-15 to 90°C room temperature)



EN 13329





**Durable like you**



**K451** Silverdale Oak, HO



K451 Silverdale Oak, HO

Thickness 8 mm  
Lock 1clic 2go pure+



EN 13329



**K451** Silverdale Oak, HO



**K284** Summer Breeze Oak, RO



**K450** Firebrand Oak, HO

Organic LONG 



8156 Red River Hickory, VH

Thickness 8 mm  
Lock 1clic 2go pure+



EN 13329



**K327** Hillside Oak, RO



**K287** Steelworks Oak, HO




**8156** Red River Hickory, VH

Organic CLASSIC 12




1.80 m .....  
70.87"

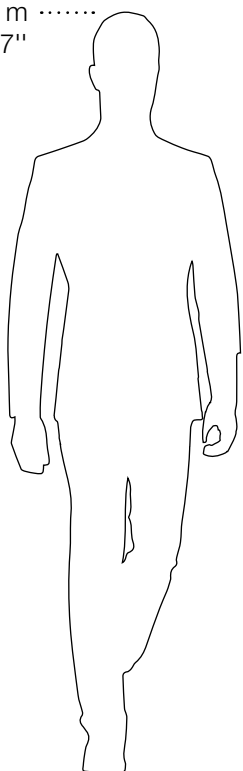

Format

**1288 (50.71") x 195 (7.68") x 12 mm**

- ✓ 12 mm strong planks
- ✓ Authentic wood texture
- ✓ Integrated anti-static effect
- ✓ Thermally stable (-15 to 90°C room temperature)



EN 13329



Relax, it's O.R.C.A.



K453 Biscotti Oak, HO

Organic CLASSIC 12



K063 Organic Oak, TO



Thickness 12 mm  
Lock 1clic 2go pure+



EN 13329



**K063** Organic Oak, TO



**K453** Biscotti Oak, HO



**K326** Sundance Oak, RO

Organic CLASSIC 12 



K477 Natural Carpenter Oak, CM

Thickness 12 mm  
Lock 1clic 2go pure+



EN 13329



**K413** Blackwater Oak, OE



**K392** Atomic Oak, RO



**K477** Natural Carpenter Oak, CM



K412 Doubloon Oak, OE

Thickness 12 mm  
Lock 1clic 2go pure+



EN 13329



**K412** Doubloon Oak, OE




**K489** Bourbon Hills Oak, HO



**Organic CLASSIC 8** 



1.80 m .....  
70.87"

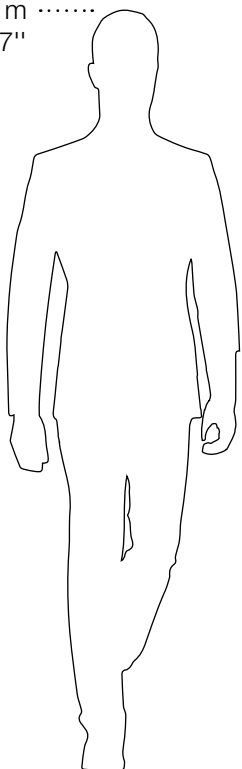

Format

**Wood design 1285 (50.59") x 192 (7.56") x 8 mm**

**Tile design 635 (25.00") x 327 (12.87") x 8 mm**

- ✔ The multi-talent floor for the whole family
- ✔ Beautiful wood- and tile decors in different textures
- ✔ Integrated anti-static effect
- ✔ Thermally stable (-15 to 90 °C room temperature)



EN 13329



**Makes the kitchen  
a living room**



1536 Michigan Oak, NL


Organic CLASSIC 8 



1532 Atlantic Oak, TO



Thickness 8 mm  
Lock 1cllic 2go pure



EN 13329



**1514** Arctic Oak, LP



**1532** Atlantic Oak, TO




**1521** Caribbean Light Oak, NL

Organic CLASSIC 8 



1533 Ontario Oak, TO

Thickness 8 mm  
Lock 1cllic 2go pure



EN 13329



**1536** Michigan Oak, NL



**1533** Ontario Oak, TO




**1517** Pacific Oak, PO

Organic CLASSIC 8 



1579 Hudson Oak, LP

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**1531** Baltic Oak, NL




**1579** Hudson Oak, LP

Organic CLASSIC 8



1530 Bristol Oak, RF

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**1523** Montreal Oak, NL



**1530** Bristol Oak, RF



**1519** Victoria Oak, HO


Organic CLASSIC 8 



1539 Liverpool Oak, HC



Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



1538 Toronto Oak, NL



1539 Liverpool Oak, HC

Organic CLASSIC 8 




1527 Amazon Slate, OS



1527 Amazon Slate, OS

Thickness 8 mm  
Lock 1clic 2go pure



EN 13329



**1525** Mississippi Slate, RT



**1528** Submarine Slate, AS




**1526** Yukon Slate, OS

Organic CLEVER LONG 



1.80 m .....  
70.87"

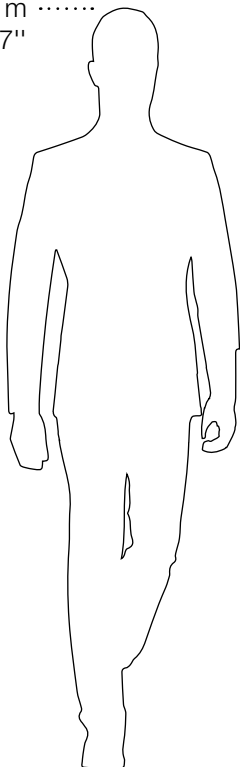

Format

**2003 (78.86") x 245 (9.65") x 6 mm**

- ✔ Slim Fit
- ✔ Traditional long plank format
- ✔ Installation in bigger dimensions
- ✔ Laying through doors
- ✔ Thermally stable (-15 to 90°C room temperature)



EN 13329



Goes a long way




K406 Eurus Oak, NL



K445 Ethereal Oak, NL

Thickness 6 mm  
Lock 1cllic 2go pure+



EN 13329



**K406** Eurus Oak, NL



**K419** Armoury Oak, NL




**K445** Ethereal Oak, NL



**K462** Gold Volcano Oak, NL



Thickness 6 mm  
Lock 1clic 2go pure+



EN 13329



**K444** Spindrift Oak, NL



**K462** Gold Volcano Oak, NL



**K482** Twilight Sterling Oak, NL


Organic CLEVER SILENT



with PS 1 mm




1.80 m .....  
70.87"

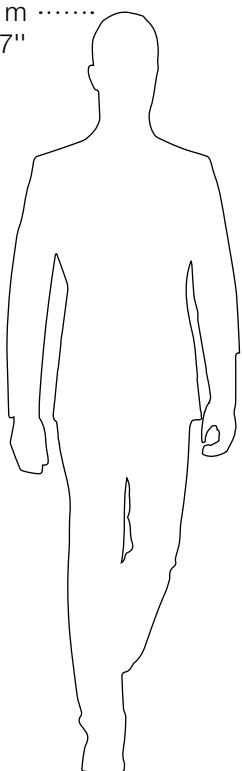

Format

**1288 (50.71") x 195 (7.68") x 6+1 mm**

- ✔ Silent due to integrated silent pad
- ✔ Additional underlay is not required, which saves time and money
- ✔ Easy installation
- ✔ Thermally stable (-15 to 90°C room temperature)



EN 13329



**Silence is creativity**



**K482** Twilight Sterling Oak, NL


**Organic CLEVER SILENT** 

with PS 1 mm



**5966** Khaki Oak, NL

Thickness 6+1 mm  
Lock 1clic 2go pure+



EN 13329



**5543** Colorado Oak, NL



**5966** Khaki Oak, NL



**5946** Rockford Oak, NL


**Organic CLEVER SILENT** 

with PS 1 mm



**K461** Antique Volcano Oak, NL

Thickness 6+1 mm  
Lock 1clic 2go pure+



EN 13329



**K419** Armoury Oak, NL



**5985** Sherwood Oak, NL



**K461** Antique Volcano Oak, NL

**Organic CLEVER SILENT**




with PS 1 mm



**8168** Tobacco Oak, NL



Thickness 6+1 mm  
Lock 1clic 2go pure+



EN 13329



**K482** Twilight Sterling Oak, NL



**K468** Gondola Oak, NL




**8168** Tobacco Oak, NL

Organic CLEVER



5966 Khaki Oak, NL

1.80 m .....  
70.87"

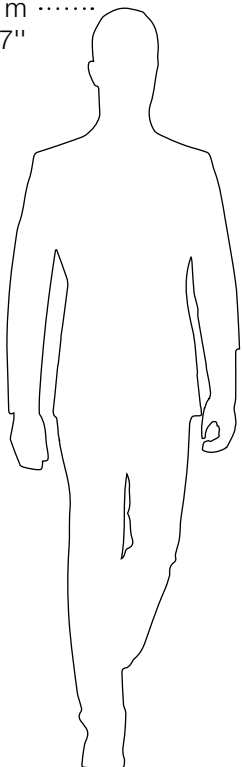

Format

**1288 (50.71") x 195 (7.68") x 6 mm**

- ✓ Slim fit
- ✓ Easy installation
- ✓ Classic format
- ✓ Thermally stable (-15 to 90°C room temperature)



EN 13329




The family's favourite





K418 Longbow Oak, NL

Thickness 6 mm  
Lock 1clic 2go pure+



EN 13329



**8461** St. Moritz Oak, NL



**K406** Eurus Oak, NL



**K418** Longbow Oak, NL



5948 Renaissance Oak, NL

Thickness 6 mm  
Lock 1clic 2go pure+



EN 13329



**K470** Natural Cashmere Oak, NL



**5948** Renaissance Oak, NL






**K395** Tornado Oak, NL



Thickness 6 mm  
Lock 1clic 2go pure+



EN 13329



**K462** Gold Volcano Oak, NL



**K395** Tornado Oak, NL



**K415** Aeolus Oak, NL

## Format overview

All thicknesses and formats

**Organic**  
**FLEX**  
PerfectPad<sup>®</sup> Cork 1 mm

189 mm  
7.44"

1288 mm / 50.71"

**Organic**  
**FLEX**  
PerfectPad<sup>®</sup> Cork 1 mm

322 mm  
12.68"

638 mm / 25.12"

**Organic**  
**LONG**

195 mm  
7.68"

2003 mm / 78.86"

**Organic**  
**CLASSIC 12**

195 mm  
7.68"

1288 mm / 50.71"

**Organic**  
**CLASSIC 8**

192 mm  
7.56"

1285 mm / 50.59"

**Organic**  
**CLASSIC 8**

327 mm  
12.87"

635 mm / 25.00"

**Organic**  
**CLEVER LONG**

245 mm  
9.65"

2003 mm / 78.86"

**Organic**  
**CLEVER SILENT**  
PS 1 mm

195 mm  
7.68"

1288 mm / 50.71"



**Organic**  
**CLEVER**

195 mm  
7.68"

1288 mm / 50.71"

# PerfectPad®

Available on all O.R.C.A. products

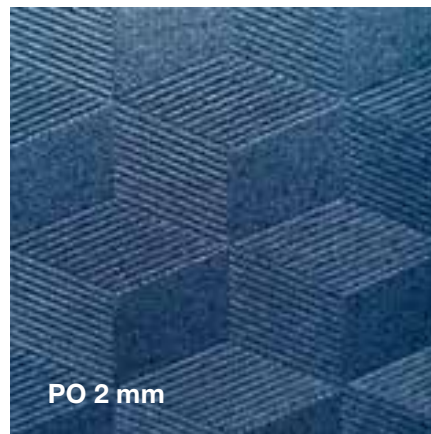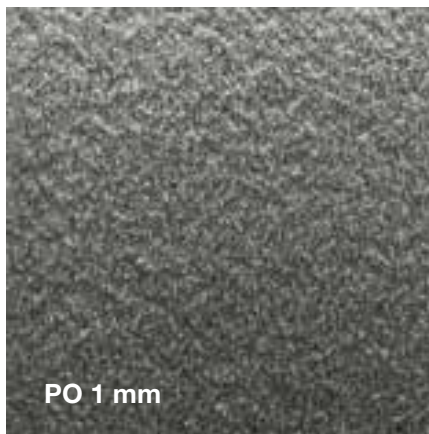

## Accessories that match your floor perfectly

### Selected range of products

Every floor needs proper accessories. We can supply you with the ideal equipment for all types of flooring. One contact, one supplier – which makes everything so much simpler for you.

### Underlays

Depending on the situation in the room, attention must be paid to the correct underlay material when installing the flooring. For this we offer multiple solutions.

### Skirting boards

Choose from a range of skirtings in various decors that match all KronoOriginal® floors. Our advanced fixing system makes it quick and simple to achieve a perfect installation.

### Additional accessories

If you still look for the proper skirting board, corner pieces, aluminium adhesive tape for sealing or you are done and wish to mop the floor, take a look at the following pages and discover the wide range of accessories.

## Get more out of your O.R.C.A. products

### With suitable accessories, you leave nothing to chance –

whether you are looking for the right underlay, skirting boards, end pieces, corners and profiles for a harmonious finish, practical tools or the right cleaning agent.



















Discover  
the full range!










## Accessories

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit
Underlay PUR 1.0		98535 [EX PUR1.0_ORCA]	Material: PET film + polyurethane heavy- duty layer + non-woven material	1 x 10 m = 10 m <sup>2</sup>
Underlay PUR 2.0		98571 [EX KO98571N]	Material: Polyurethan and mineral fillers	1 x 7.5 m = 7.5 m <sup>2</sup>
Underlay WOOD 5.0		90171 [EX 90171]	Material: Wood fibres	0.79 x 0.59 m x 15 = 7 m <sup>2</sup>
PE foil		98111 [EX FOLIE2.0]	Material: Polyethylene	2 x 7.5 m = 15 m <sup>2</sup>
Aluminium tape		98191 [EX ALUBAND]	Thickness: 0.048 mm Width: 50 mm	1 roll (50 m)
Transition profile, 2-part, screw-in		91231 91221	900 mm or 2700 mm	1 pcs.
Ramp profile, 2-part, screw-in		91251 91241	900 mm or 2700 mm	1 pcs.
End profile, 2-part, screw-in		91211 91201	900 mm or 2700 mm	1 pcs.

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit
Transition click profile		98391 98381	900 mm or 2700 mm	1 pcs.
Ramp click profile		98411 98401	900 mm or 2700 mm	1 pcs.
End click profile		98371 98361	900 mm or 2700 mm	1 pcs.
3in1 profiles		95315 [EX 95315-A002] anodised stainless steel	1000 mm	10 pcs.
K58C moisture resistant		95316 [EX xxxxSLH-ORCA]	2600 x 58 x 18 mm	10 pcs.
K58C Design skirting board		97345 [EX 97345-9002] (white)  97345 [EX 97345-L056] (silver)	2400 x 58 x 18 mm	10 pcs.
Accessories for K58C skirting board		98011 98001 98021	External corners Internal corners End caps	90° in packs of 2 90° in packs of 2 in packs of 4, 2 left and 2 right
Mounting clips		91501 [EX 50510]	-	Box of 30 pieces, complete with screws and rawl plugs


































































## Accessories

Article	Illustration	Item No. [Customer Code]	Description	Packing Unit
Tapping-block		90274 [EX Schlagholz_ORCA]	300 x 50 x 30 mm	12 pcs.
Spacer		90292 [EX ABSTANDSKEIL]	-	30 spacer per bag
Clickguard™ joint sealant		90431 [EX 94270]	-	125 ml ≈ ca. 10 m <sup>2</sup>
Wax-repair set, mixable		90511 [EX F996]	-	7 wax blocks, 1 melting tool, 1 cleaning combed scraper, 1 green/white pad, 1 grey abrasive pad
Cleaner for floors with O.R.C.A.		90411 [EX REINIGER_ORCA]	-	750 ml





# Decor overview

Flooring Type	Collection Name	Decors
O.R.C.A. flooring	<b>Organic FLEX</b>	          
	<b>Organic LONG</b>	     
	<b>Organic CLASSIC 12</b>	       
	<b>Organic CLASSIC 8</b>	                
	<b>Organic CLEVER LONG</b>	     
	<b>Organic CLEVER SILENT</b>	        
	<b>Organic CLEVER</b>	       


■ decor editions

# Packaging information

Plank Size	Thickness	Planks/ Pack.	m <sup>2</sup> / sq ft   Pack.	Weight/Pack. [kg   lbs]	Pack./Pallet = m <sup>2</sup>   sq ft
638 x 322 mm   25.12" x 12.68"	7 mm	12	2.47   26.53	16   35	32 = 79   849
1288 x 189 mm   50.71" x 7.44"	7 mm	10	2.43   26.19	16   35	52 = 126   1356
2003 x 195 mm   78.86" x 7.68"	8 mm	7	2.73   29.42	20   44	40 = 109   1177
1288 x 195 mm   50.71" x 7.68"	12 mm	6	1.51   16.21	16   36	52 = 78   843
635 x 327 mm   25.00" x 12.87"	8 mm	11	2.28   24.58	17   38	32 = 73   786
1285 x 192 mm   50.59" x 7.56"	8 mm	9	2.22   23.89	16   36	52 = 115   1242
2003 x 245 mm   78.86" x 9.65"	6 mm	8	3.93   42.30	23   50	36 = 141   1521
1288 x 195 mm   50.71" x 7.68"	6+1 mm	9	2.26   24.32	13   29	52 = 117   1265
1288 x 195 mm   50.71" x 7.68"	6 mm	11	2.76   29.73	16   35	52 = 144   1546



Made by Kronospan



[www.blauer-engel.de/uz176](http://www.blauer-engel.de/uz176)

\* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions). Statement on level of emission of volatile substances in indoor air posing a toxic threat during inhaling – on a scale from A+ (very low-emission) to C (high-emission).

[www.eco-institut.de/e/portfolio/emissions-dans-lair-interieur](http://www.eco-institut.de/e/portfolio/emissions-dans-lair-interieur)



[www.krono-original.com](http://www.krono-original.com)  
[www.facebook.com/KronoOriginal](https://www.facebook.com/KronoOriginal)



[www.kronospan.com](http://www.kronospan.com)  
[info@krono-original.com](mailto:info@krono-original.com)